


REV.	DESCRIPTION	DATE
A	10'0644	Jul 13,2010

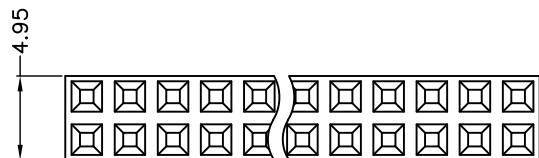

$$A = (\text{TOTAL NO. OF PINS}/2) \times 2.54 + 0.66 \pm 0.38$$



$$B = (\text{TOTAL NO. OF PINS}/2 - 1) \times 2.54$$

MATERIALS



1. HOUSING : THERMOPLASTIC (UL 94V-0). BLACK.
2. COVER : THERMOPLASTIC (UL 94V-0).BLACK.
3. TERMINAL : COPPER ALLOY,T=0.64mm.
GOLD PLATED OVER NICKEL .

SPECIFICATION

1. CURRENT RATING : 3A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000MΩ MIN.
AT 1000V DC.
4. CONTACT RESISTANCE : 30mΩ MAX.
5. OPERATING TEMPERATURE : -55°C TO +85°C.

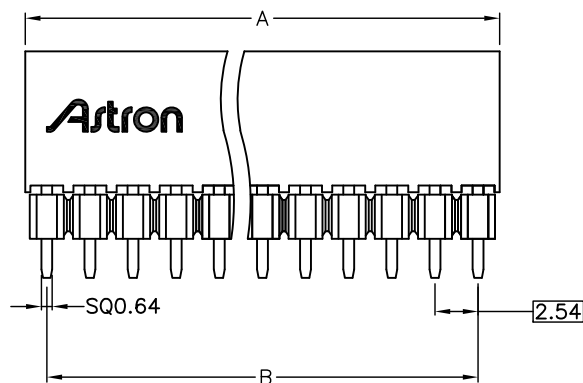

PART NUMBER INFORMATION

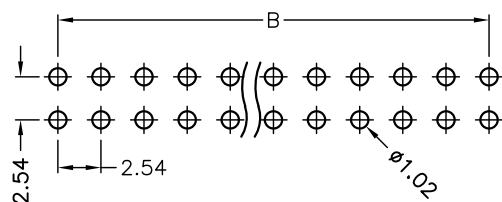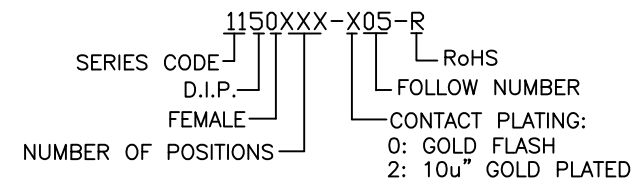

RECOMMEND P.C.B. LAYOUT
TOLERANCE ± 0.05
TOP VIEW

TOLERANCE .0 = ± 0.38 .00 = ± 0.25 .000 = ± 0.15 ANG. = $\pm 3^\circ$		DRAWER <i>Sally</i> CHECK <i>Yun</i> APP'D <i>Tom yang</i> PRODUCT SPEC.	 ASTRON TECHNOLOGY CORP. NAME Δ PC104 SOLDER TAIL LENGTH 2.30mm
UNITS : mm		DRAW NO. R11500(40,64)-X05	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A