

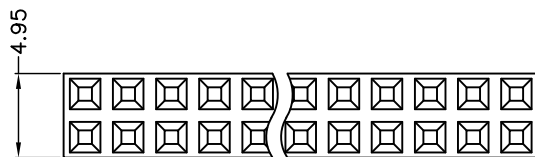


REV.	DESCRIPTION	DATE
F	05'0707	Jul 15,2005
G	09'0342	Mar 18,2009
H	10'0644	Jul 13,2010

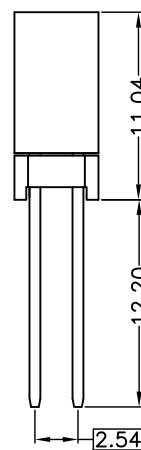

$$A = (\text{TOTAL NO. OF PINS}/2) \times 2.54 + 0.66 \pm 0.38$$

$$B = (\text{TOTAL NO. OF PINS}/2 - 1) \times 2.54$$

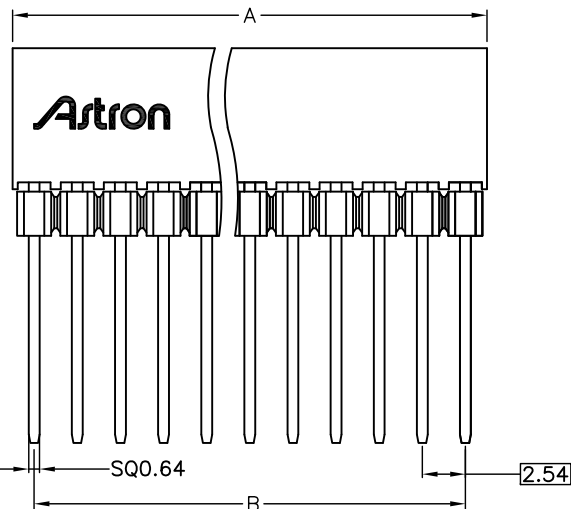



### MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0)BLACK.
2. COVER : THERMOPLASTIC (UL 94V-0).BLACK.
3. TERMINAL : COPPER ALLOY,T=0.64mm.  
GOLD PLATED OVER NICKEL .

### SPECIFICATION

1. CURRENT RATING : 3A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :  
1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000MΩ MIN.  
AT 1000V DC.
4. CONTACT RESISTANCE : 30mΩ MAX.
5. OPERATING TEMPERATURE : -55°C TO +85°C.

### PART NUMBER INFORMATION:

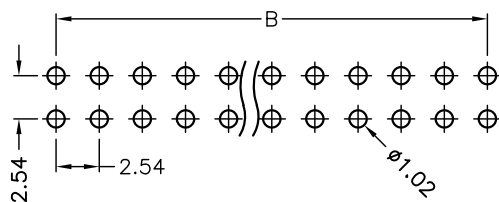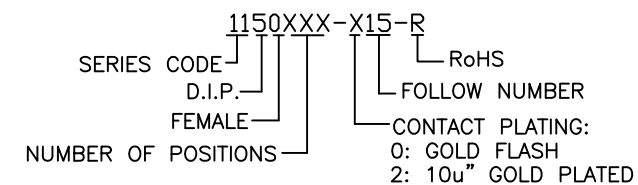

RECOMMEND P.C.B. LAYOUT  
TOLERANCE ±0.05  
TOP VIEW

<b>TOLERANCE</b> .0=±0.38 .00=±0.25 .000=±.15 ANG.=±3°		<b>DRAWER</b> <i>Sally</i> <b>CHECK</b> <i>Yun</i> <b>APP'D</b> <i>Jomyang</i>	 <b>ASTRON TECHNOLOGY CORP.</b> <b>NAME</b> <i>ZH</i> 2.54PH HEADER RECETACLE SOLDER TAIL LENGTH 12.10mm (AT LOGO)
 UNITS : mm		<b>PRODUCT SPEC.</b> _____ <b>DRAW NO.</b> R1150XXX-X15-R	
<b>SCALE</b> NONE	<b>SIZE</b> A4	<b>SHEET</b> 1 OF 1	<b>REV.</b> H