


REV.	DESCRIPTION	DATE
A	RELEASE	Aug 12, 2008

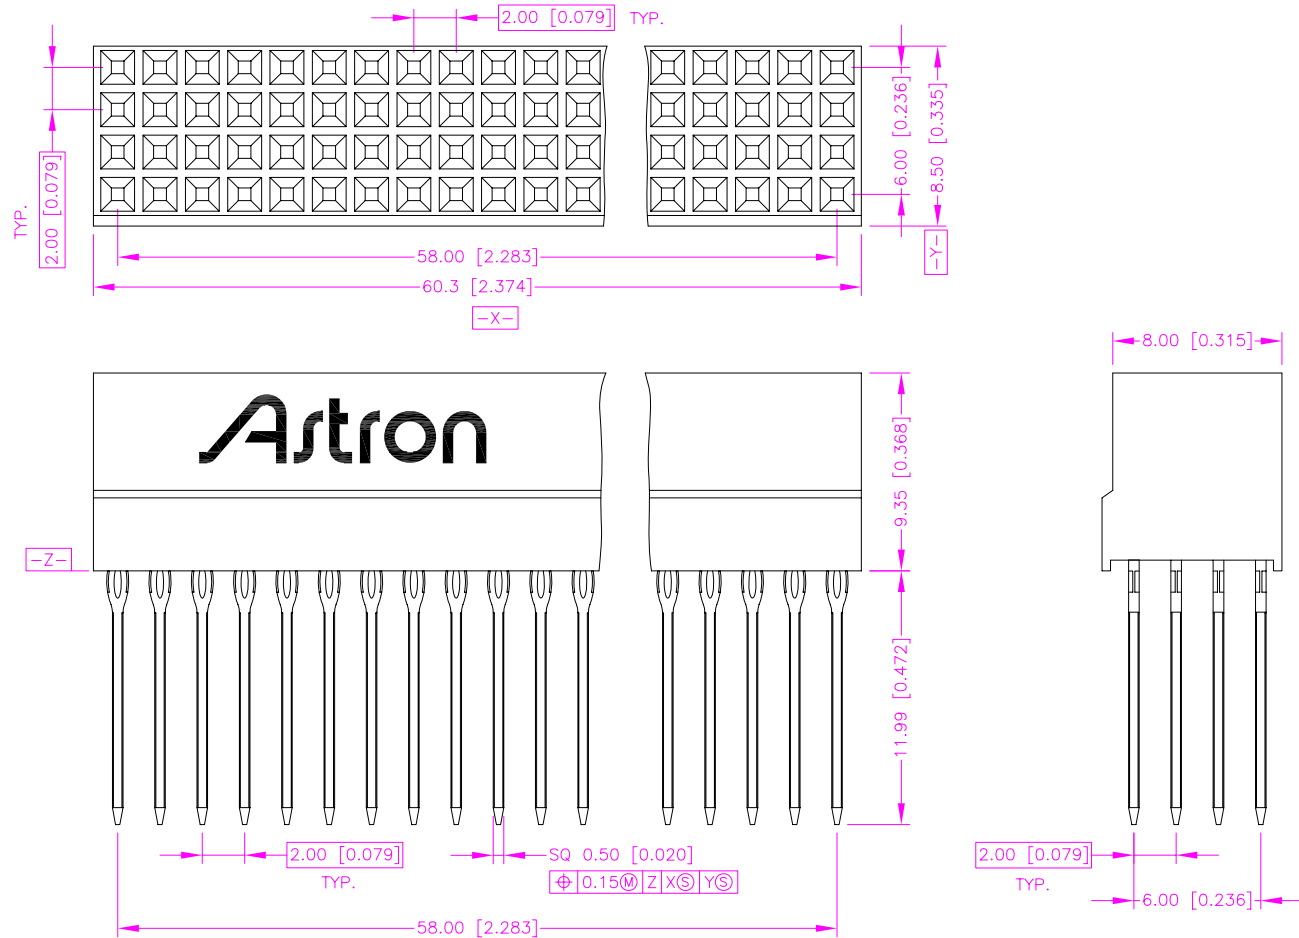



MATERIALS

1. HOUSING : THERMOPLASTICS(UL 94V-0).BLACK.
2. TERMINAL : COPPER ALLOY, (t=0.50mm)
GOLD PLATED ON CONTACT AREA,
UNDER NICKEL PLATED.

SPECIFICATION

1. CURRENT RATING : 2A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE :
1000MΩ MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30mΩ MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

PART NUMBER INFORMATION:

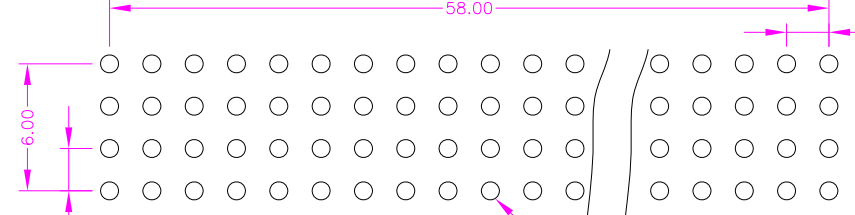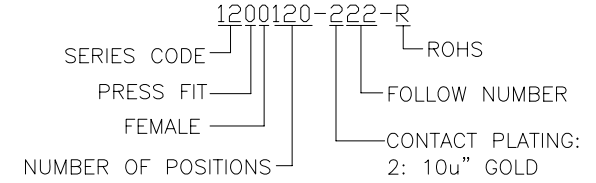

RECOMMENDED P.C.B LAYOUT
TOLERANCE ±0.05
TOP VIEW

0.94-0.83 DIA OF FINISHED HOLE AFTER PLATING
DRILLED HOLE DIA 1.02-0.98
TIN PLATED 0.005 MIN
COPPER PLATING 0.025-0.075
(FOLLOW SPEC-PC104)

TOLERANCE .0=±0.38 [.015] .00=±0.25 [.010] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>Liao</i> CHECK <i>Chu</i> APP'D <i>Wisely</i>	 ASTRON TECHNOLOGY CORP. NAME PC/104 Plus PRESS FIT 2.0PH CONN 4RX30P W/AT LOGO (H=11.99)(ROHS)
UNITS : mm [inch]		PRODUCT SPEC. —	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A