

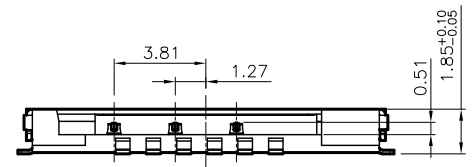
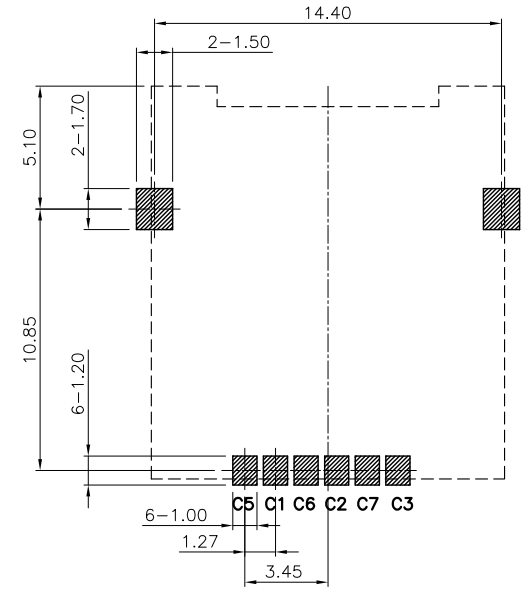


REV.	DESCRIPTION	DATE
A	RELEASE	Mar 12, 2013
B	201704190	Apr 19, 2017

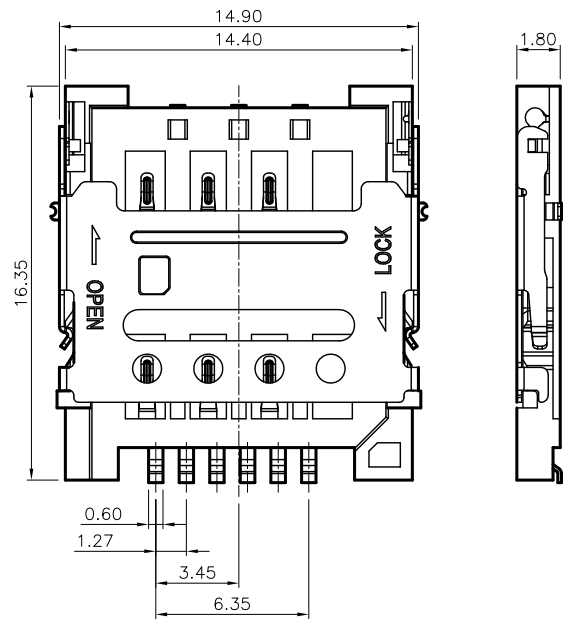

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE:±0.05 TOP VIEW




**MATERIALS**

1. HOUSING : THERMOPLASTIC (UL 94V-0) .
2. TERMINAL : COPPER ALLOY, PLATING SEE TABLE.
3. SHELL : SUS.


**SPECIFICATION**

1. CURRENT RATING : 1.0 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR 1 MINUTE.
3. INSULATION RESISTANCE : 1000MΩ MIN.AT 500V DC.
4. CONTACT RESISTANCE : 30mΩ MAX.
5. OPERATING TEMPERATURE : -25°C TO +70°C.


**PART NUMBER INFORMATION :**

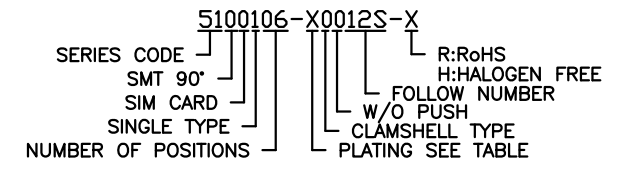

MICRO SIM CARD	
PIN NO.	DESCRIPTION
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED



芯片面朝下视图

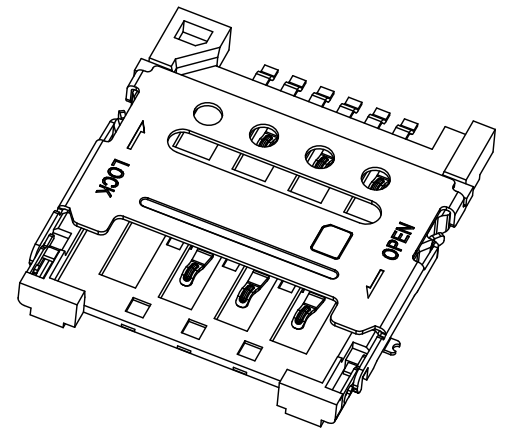

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	6	GOLD 30u"

<b>TOLERANCE</b> .0=±0.25 .00=±0.15 .000=±0.10 ANG.=±3°	DRAWER <i>3822U</i>	<b>INMO</b> 东莞市英墨电子有限公司 INMO Electronics Co.,Ltd
	CHECK <i>3822U</i>	
	APP'D <i>34WX</i>	
	PRODUCT SPEC. —	
UNITS : mm 	DRAW NO.	
SCALE NONE SIZE A8 SHEET 1 OF 1 REV. B	R5100106-X0012S-X	