REV.	DESCRIPTION	DATE
A	RELEASE	Mar 12, 2013

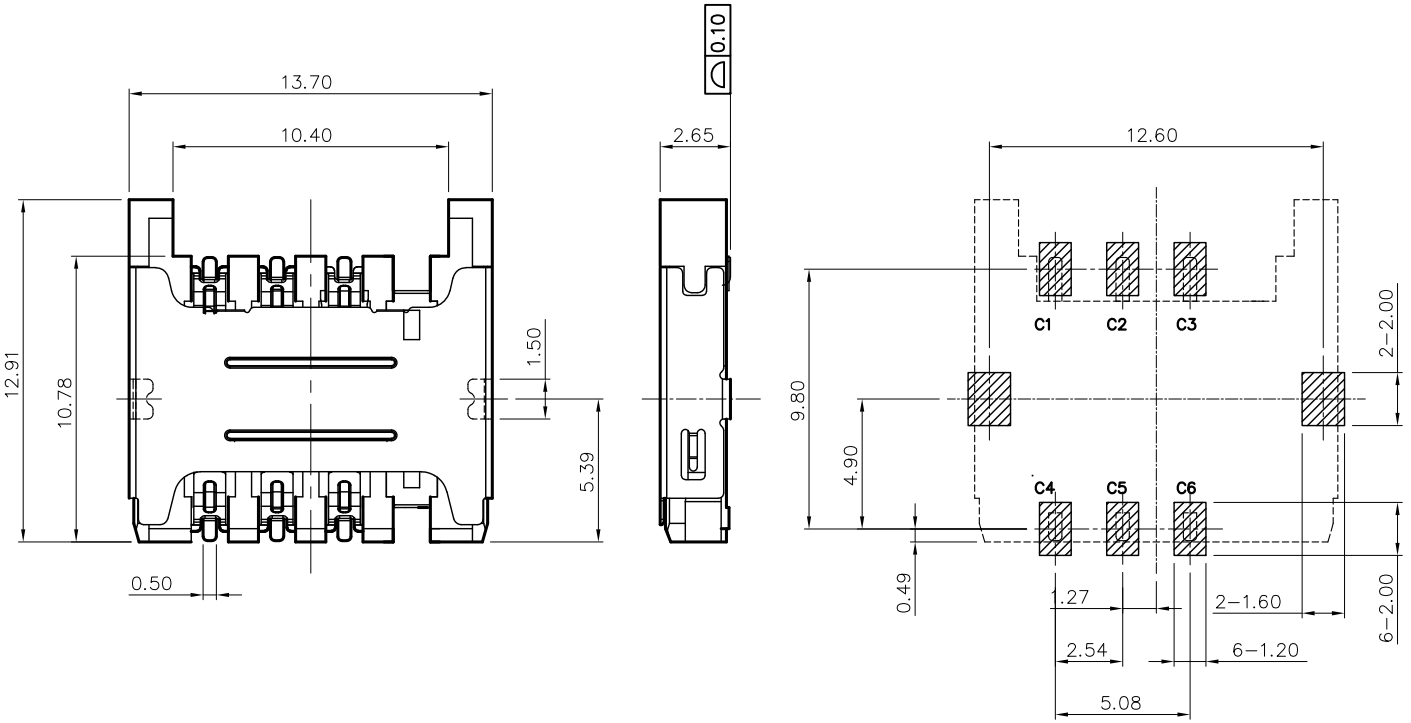

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0) .
2. TERMINAL : COPPER ALLOY,
   PLATING :GOLD PLATED OVERALL.
3. SHELL :STAINLESS STEEL.
   PLATING :NICKEL PLATED OVERALL.
   GOLD PLATED ON SOLDER TAILS

RECOMMENDED P.C.B. LAYOUT
TOLERANCE:±0.05 TOP VIEW

PCB AREA
CONNECT AREA

PART NUMBER INFORMATION :

5100106-X1030S-X

- SERIES CODE
- SMT 90°
- SIM CARD
- SINGLE TYPE
- NUMBER OF POSITIONS
- R: RoHS
  H: HALOGEN FREE
- FOLLOW NUMBER
- W/O PUSH
- INSERT TYPE
- PLATING SEE TABLE

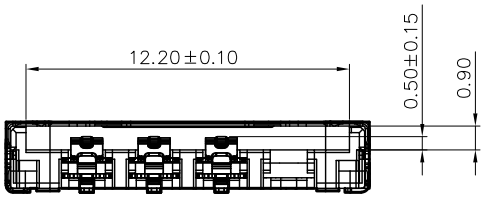

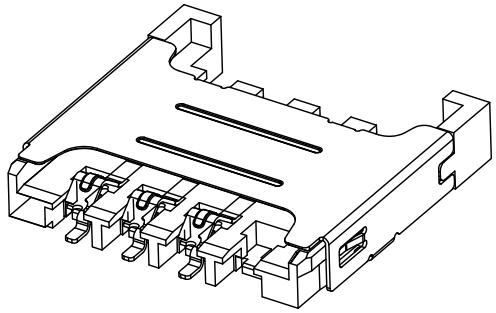

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	6	GOLD 30u"

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.10 ANG.=±3°	DRAWER JERRY CHECK JERRY APP'D KAWX PRODUCT SPEC. —	INMO 东莞市英墨电子有限公司 INMO Electronics Co.,Ltd NAME MICRO SIM SOCKET 6PIN 2.65H
UNITS : mm		DRAW NO. R5100106-X1030S-X
SCALE NONE / SIZE A8	SHEET 1 OF 1 / REV. A	

DRAWING NAME: R