

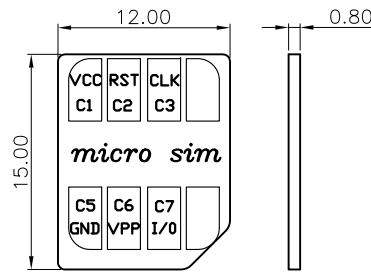
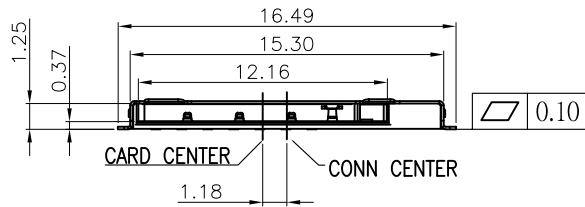
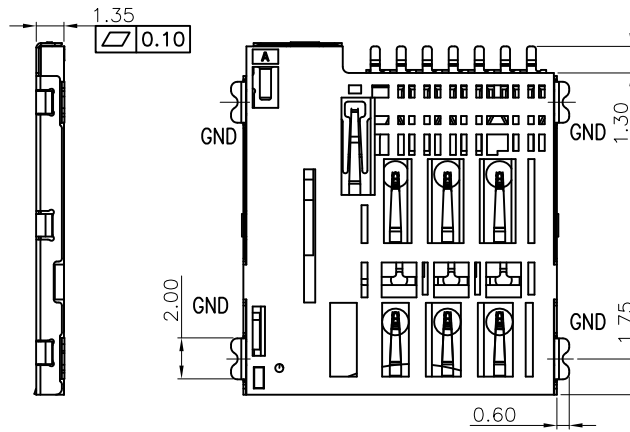


1. 此PIN为CD-PIN, 无须时, 此PIN无须设计PCB焊盘, 实物有此PIN脚
2. 此PIN为CD-PIN, 支持热插拔, 有须要可设计此功能。



REV.	DESCRIPTION	DATE
A	RELEASE	Nov 18, 2017

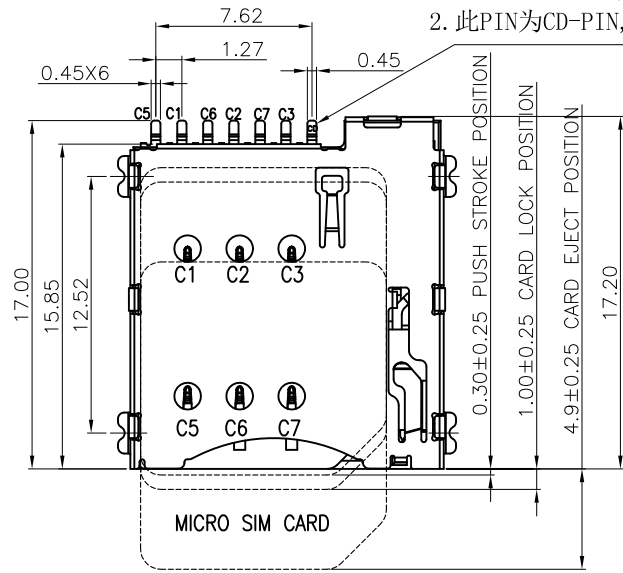

**MICRO SIM CARD**

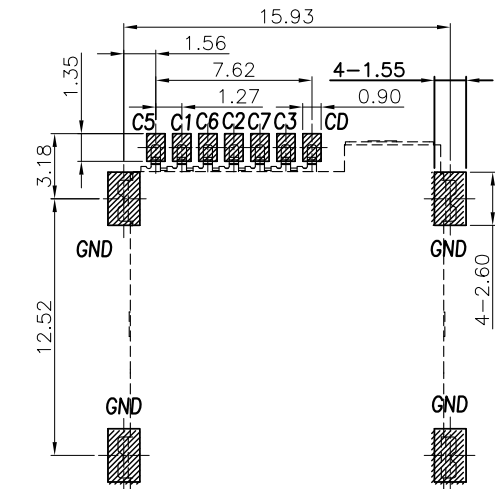

**RECOMMEND PCB LAYOUT  
TOLERANCE: ±0.05  
TOP VIEW**

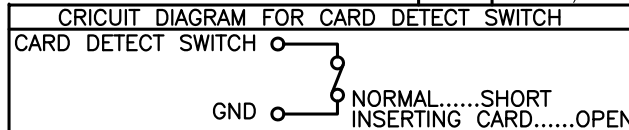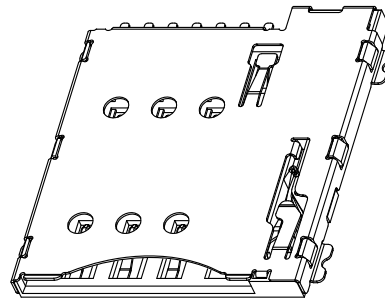


**MATERIALS**

1. HOUSING : THERMOPLASTIC (UL 94V-0).
2. TERMINAL : COPPER ALLOY,  
PLATING : PLATING SEE TABLE.
3. SHELL : STAINLESS STEEL.  
PLATING : NICKEL PLATED OVERALL.

**SPECIFICATION**

1. CURRENT RATING :0.5 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR 1 MINUTE.
3. INSULATION RESISTANCE : 1000MΩ MIN.AT 500V DC.
4. CONTACT RESISTANCE : 100mΩ MAX.
5. OPERATING TEMPERATURE : -20°C TO +70°C.
6. MATING CYCLES:5,000 INSERTIONS.

**PART NUMBER INFORMATION :**

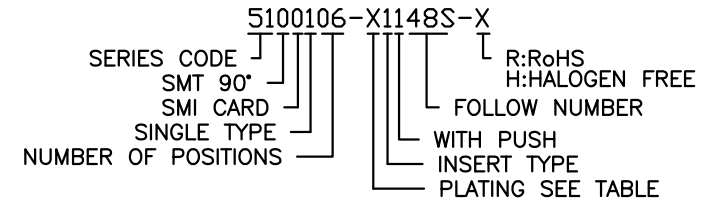

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	H	G/F + TIN'

<b>TOLERANCE</b> .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°	<b>DRAWER</b> 221 <b>CHECK</b> 221 <b>APP'D</b> 221/221	<b>INMO</b> 东莞市英墨电子有限公司 INMO Electronics Co.,Ltd
UNITS : mm	<b>PRODUCT SPEC.</b> —	
<b>SCALE</b> NONE <b>SIZE</b> A7	<b>SHEET</b> 1 OF 1 <b>REV.</b> A	<b>MICRO SIM 6 PIN PUSH</b> 有检测PIN (无柱)1.35H. <b>DRAW NO.</b> R5100106-X1148S-X