

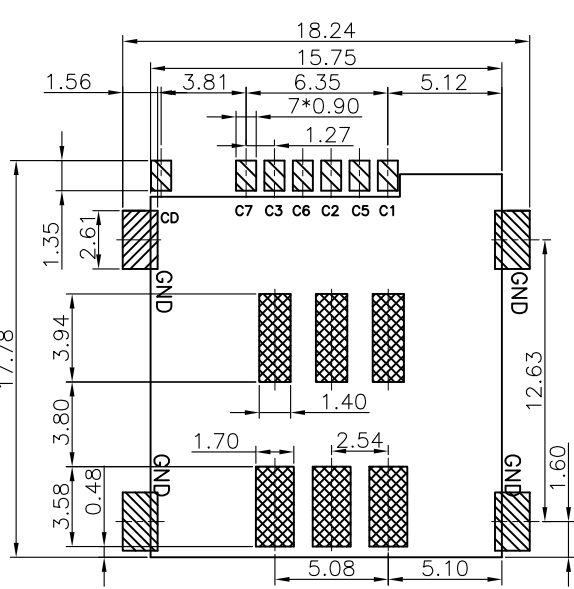
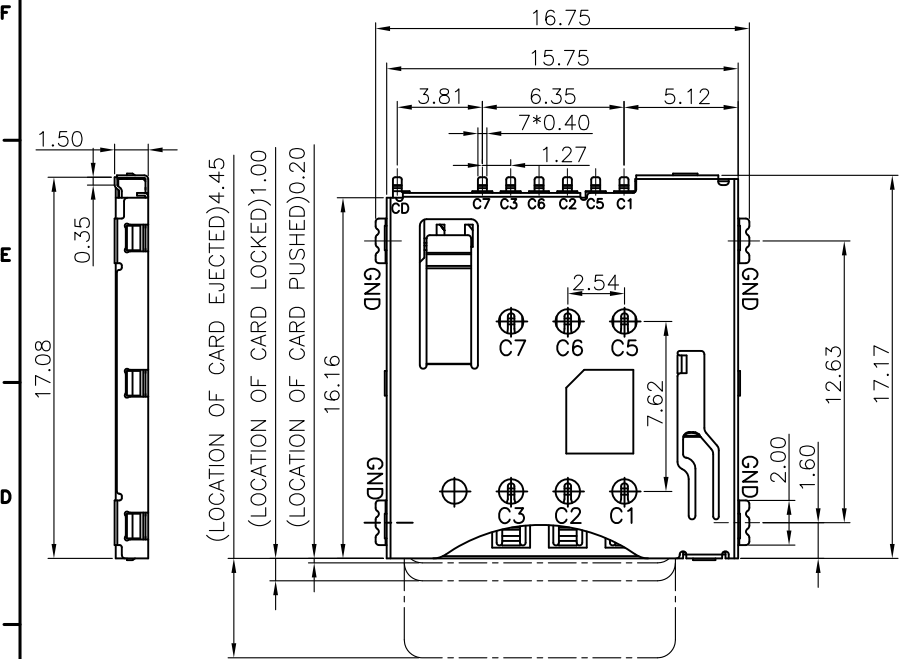



REV.	DESCRIPTION	DATE
A	RELEASE	Mar 12, 2013
B	2016022201	2016.02.22
C	2016102501	2016.10.25



RECOMMENDED P.C.B. LAYOUT
TOLERANCE:±0.05 TOP VIEW

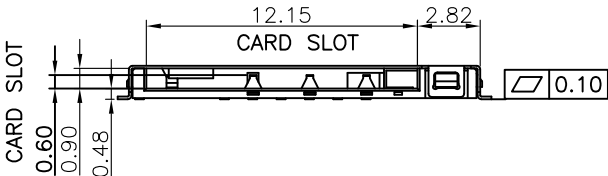

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN



Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	6	GOLD 30u"

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.10 ANG.=±3°		DRAWER <i>3822V</i>	DRAW NO. R5100106-01055S-R
UNITS : mm		CHECK <i>3822V</i>	
SCALE NONE	SIZE A8	APP'D <i>3822V</i>	DRAW NO.
SHEET 1 OF 1	REV. C	PRODUCT SPEC.	

INMO
东莞市英墨电子有限公司
INMO Electronics Co.,Ltd

MICRO SIM PUSH H1.5 6PIN+1

MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0) .
- TERMINAL : COPPER ALLOY,
PLATING : GOLD PLATED ON CONTACT AREA
AND SOLDER TAILS,NICKEL PLATED OVERALL.
- SHELL : STAINLESS STEEL.
PLATING : NICKEL PLATED OVERALL.
GOLD PLATED ON SOLDER TAILS

SPECIFICATION

- CURRENT RATING : 1.0 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
- CONTACT RESISTANCE : 50mΩ MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.

PART NUMBER INFORMATION :

