

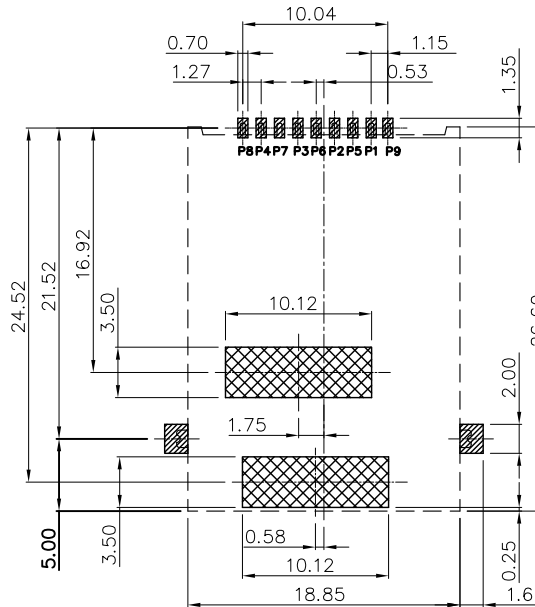
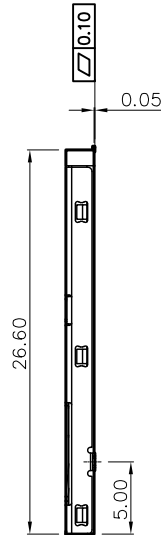
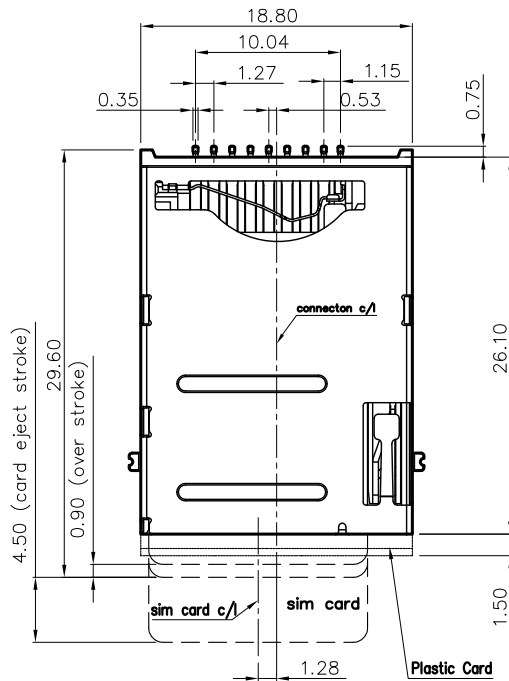


REV.	DESCRIPTION	DATE
A	RELEASE	Aug 13, 2011

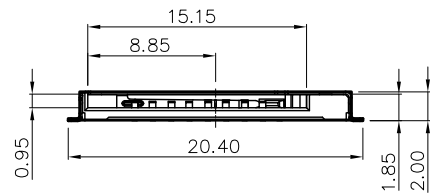

RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05
TOP VIEW



MATERIALS


1. HOUSING : THERMOPLASTIC (UL 94V-0) .
2. TERMINAL : COPPER ALLOY,
PLATING : PLATING SEE TABLE
3. SHELL : STEEL,
PLATING : NICKEL PLATED OVERALL.

SPECIFICATION

1. CURRENT RATING : 1.5 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR 1 MINUTE.
3. INSULATION RESISTANCE : 100M Ω MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m Ω MAX.


PART NUMBER INFORMATION :

5100108-X0010S-X

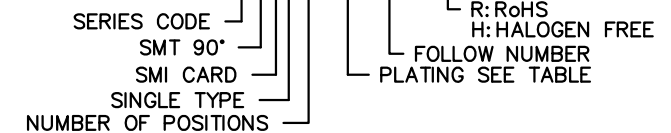

DESCRIPTION OF PLATING ON TERMINALS

NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	H	G/F + TIN
2	GOLD 10u"	T	PLATED TIN

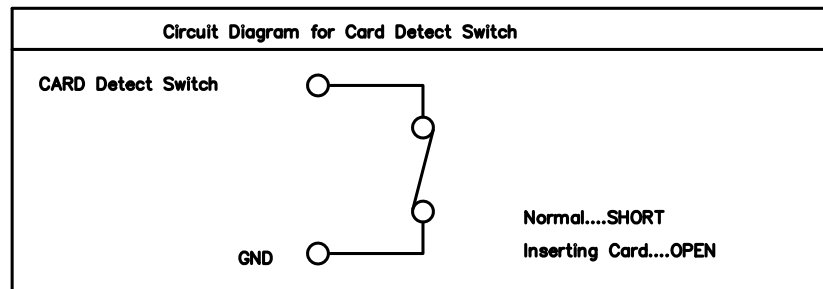

Connector terminal NO.	Pin NO.
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK: Clocking signal
Pin 4	Reserved
Pin 5	GND:PWR signal and GND
Pin 6	VPP:Programming Voltage
Pin 7	I/O: Serial data input/output
Pin 8	Reserved
Pin 9	CD: CARD Detect Switch

TOLERANCE .0= ± 0.25 .00= ± 0.15 .000= ± 0.05 ANG.= $\pm 3^\circ$	DRAWER 21 CHECK
UNITS : mm	APP'D
SCALE NONE	PRODUCT SPEC.
SIZE A6	SHEET 1 OF 1
REV. A	

INMO 东莞市英墨电子有限公司 INMO Electronics Co.,Ltd	
NAME SIM CARD 8PIN PUSH PUSH 2.0H	
DRAW NO. R5100108-X0010S-X	