

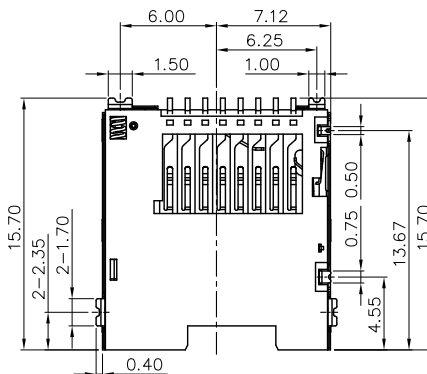
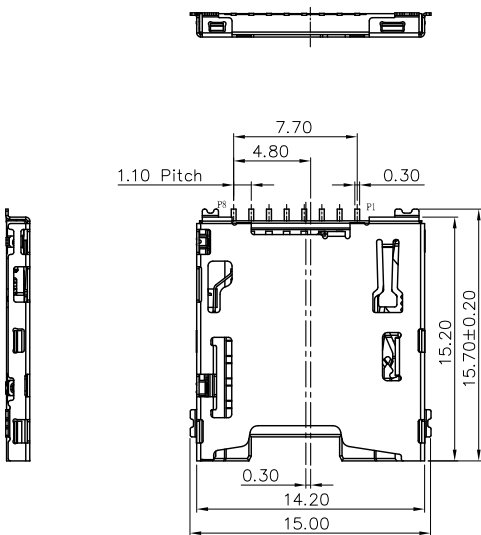
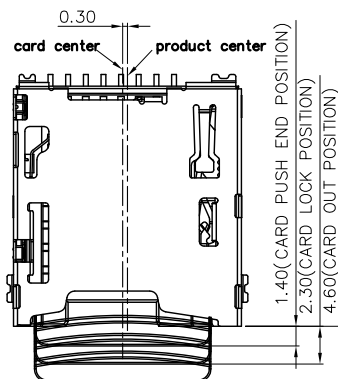


REV.	DESCRIPTION	DATE
A	RELEASE	Oct. 06, 2021





NOTES :


- MATERIAL :
 - HOUSING: LCP UL94 V-0, BLACK COLOR.
 - SHELL: STAINLESS STEEL
 - CONTACT: PHOSPHOR BRONZE
- FINISH :
 - CONTACT: GOLD PLATING ON CONTACT AREA, MATTE TIN 100u" MIN ON SOLDER TAIL AREA. 50u" MIN NICKEL PLATING OVERALL.
 - SHELL: 30u" MIN NICKEL PLATING OVERALL. Au 1u" MIN ON SOLDER TAIL AREA.
- ELECTRICAL CHARACTERISTICS:
 - OPERATING VOLTAGE : 100V AC(rms)/DC.
 - CURRENT RATING : 0.5 A.
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - CONTACT RESISTANCE: 100 m OHMS MAX.
 - INSULATION RESISTANCE: 1000M OHMS MIN. AT 250VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/1MINUTE.




PART NUMBER INFORMATION :

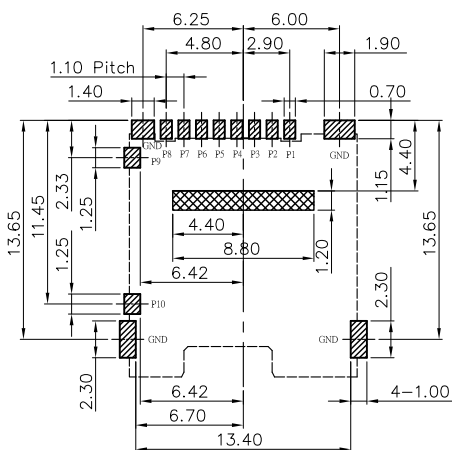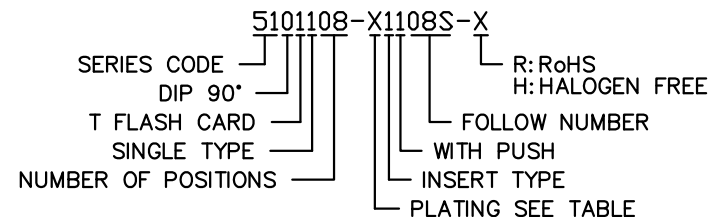

RECOMMEND PCB LAYOUT TOP VIEW
TOLERANCE: ±0.05



⊠ : PROHIBITION AREA

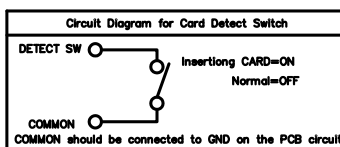

Pin No.	Discription
Pin 1	DAT2: Data line
Pin 2	CD/DAT3: card Detect/Data line
Pin 3	CMD: command/Response
Pin 4	VDD: Supply voltage
Pin 5	CLK: Clock
Pin 6	VSS: Supply voltage ground
Pin 7	DAT0: Data line
Pin 8	DAT1: Data line
Pin 9	DETECT SW(GND)
Pin 10	DETECT SW(CD)
GND	Cover GND

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	H	G/F + TIN


TOLERANCE .0=±0.38 .00=±0.25 .000=±0.05 ANG.=±3°	DRAWER <i>SL</i> CHECK <i>SL</i> APP'D <i>SL</i> PRODUCT SPEC. —	<p>INMO 东莞市英墨电子有限公司 INMO Electronics Co.,Ltd</p> <p>NAME T-FLASH CARD SOCKET PUSH 1.5H</p>	
<p>UNITS : mm</p>	<p>DRAW NO. R5101108-X1108S-X</p>		
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. *

包裝作業規範


REV.	DESCRIPTION	DATE
A	RELEASE	Oct. 06, 2021

包裝作業圖示及說明 (PACKING OPERATION DIAGRAM & INSTRUCTION)



- 一.
- 將成品一一放入REEL包裝盤內, 依同一方向放入 .
 - 包裝時, 如下圖所示 .

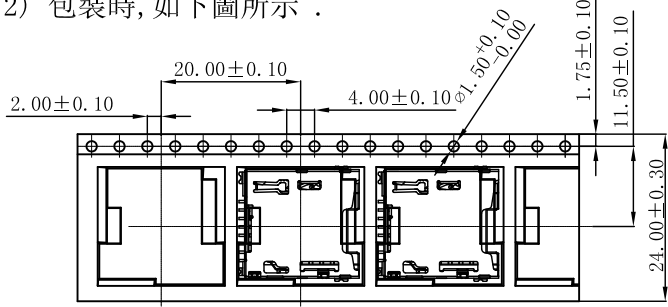


- 二.
- 裝盤前先把前面空25pcs產品, 然后再開始裝盤, 尾端也需空出15pcs產品.
 - 裝滿成品的REEL包裝盤如下圖所示.
 - 一個REEL包裝盤放置 1200 個成品 .

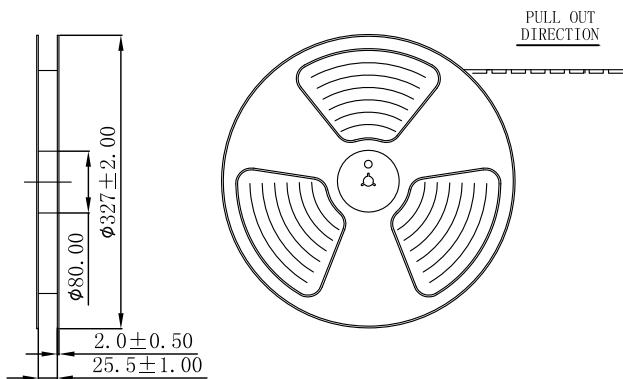

- 三.
- 每箱裝 10 盤REEL包裝盤 .
 - 每箱放置 12000 PCS 的成品 .

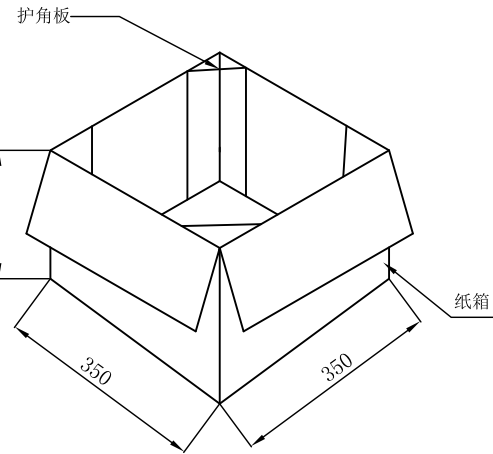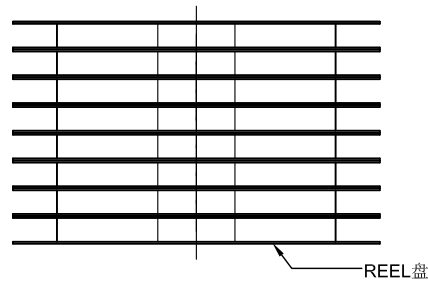


- 四.
- 用TAPE將紙箱封實 .

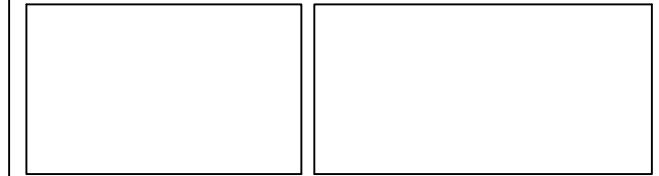

備註 (REMARK)

- 若有未裝滿之零數箱, 必須以緩衝材塞滿 .

PART NUMBER INFORMATION :

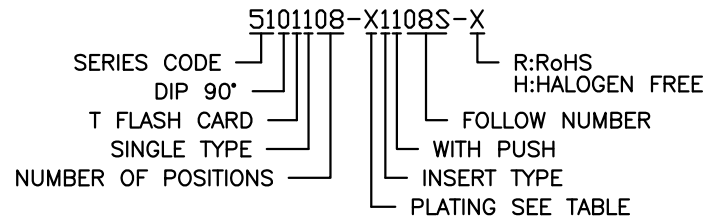

TOLERANCE .0=±0.38 .00=±0.25 .000=±0.05 ANG.=±3°	DRAWER SL	INMO 东莞市英墨电子有限公司 INMO Electronics Co.,Ltd
	CHECK SL	
 UNITS : mm	APP'D HAWK	DRAW NO. R5101108-X1108S-X
	PRODUCT SPEC. -	