
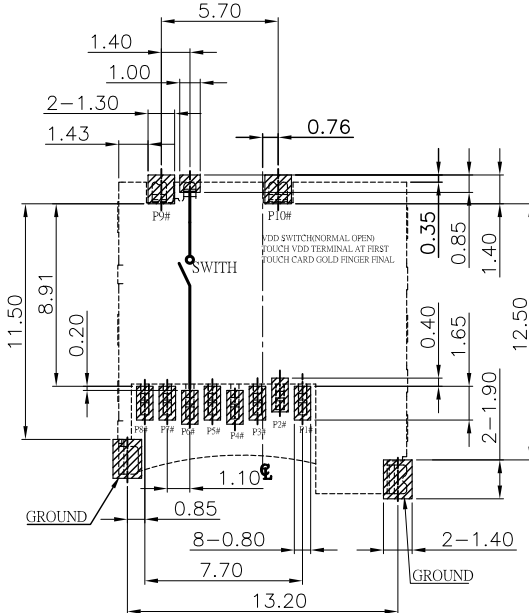

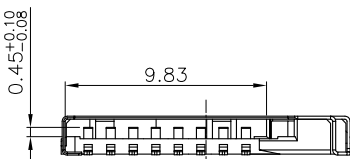
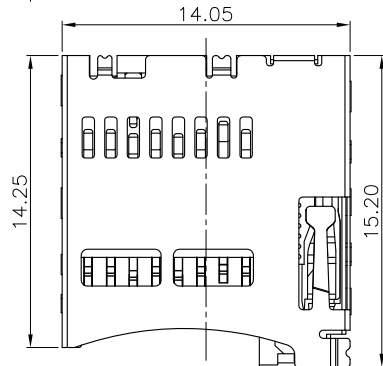


REV.	DESCRIPTION	DATE
A	RELEASE	May 06, 2016

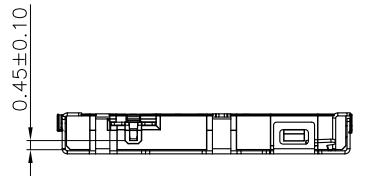

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05
TOP VIEW




MATERIALS

1. HOUSING : HERMOPLASTIC (UL 94V-0) .
2. TERMINAL : COPPER ALLOY, PLATING SEE TABLE
3. SHELL : STAINLESS STEEL, NICKEL PLATED OVERALL.


SPECIFICATION

1. CURRENT RATING : 0.5 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
300V AC R.M.S. FOR 1 MINUTE.
3. INSULATION RESISTANCE :500MΩ MIN.AT 250V DC.
4. CONTACT RESISTANCE : 100mΩ MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. MATIING DURABILITY : 10000 CACLES.

PART NUMBER INFORMATION :

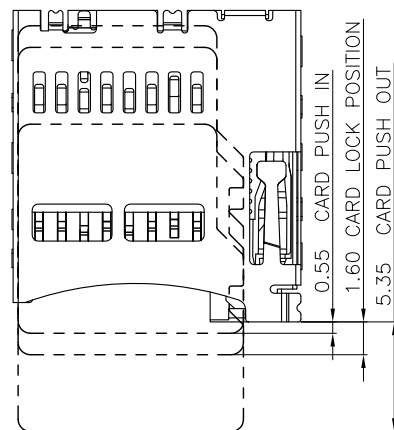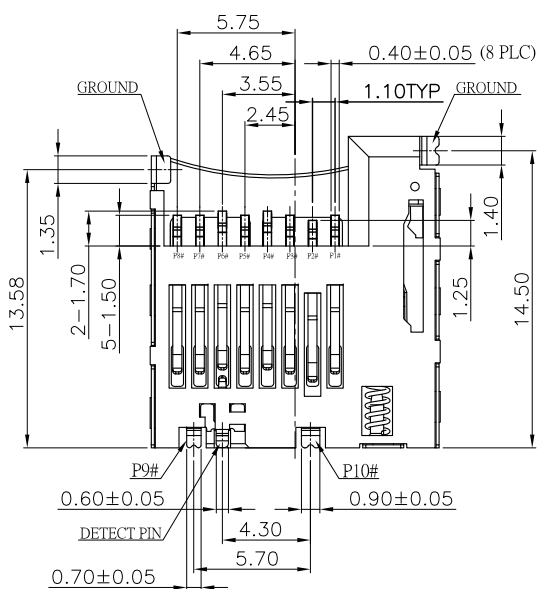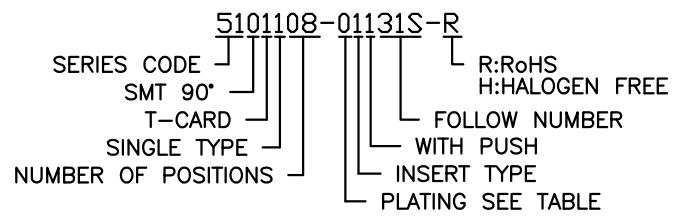

Pin No.	MICRO SD
PIN1	DAT2 1P
PIN2	CD/DAT3 2P
PIN3	CMD 3P
PIN4	VDD 4P
PIN5	CLK 5P
PIN6	VSS 6P
PIN7	DAT0 7P
PIN8	DAT1 8P
PIN9	CARD DETECT
PIN10	



DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	6	GOLD 30u"

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°	DRAWER 2/1 CHECK 2/1 APP'D 2/1	INMO 东莞市英墨电子有限公司 INMO Electronics Co.,Ltd
	PRODUCT SPEC. T-FLASH 8P PUSH 1.9H (内焊) 有侦测PIN	
UNITS : mm 	SCALE NONE SIZE A7 SHEET 1 OF 1 REV. A	DRAW NO. R5101108-01131S-R