
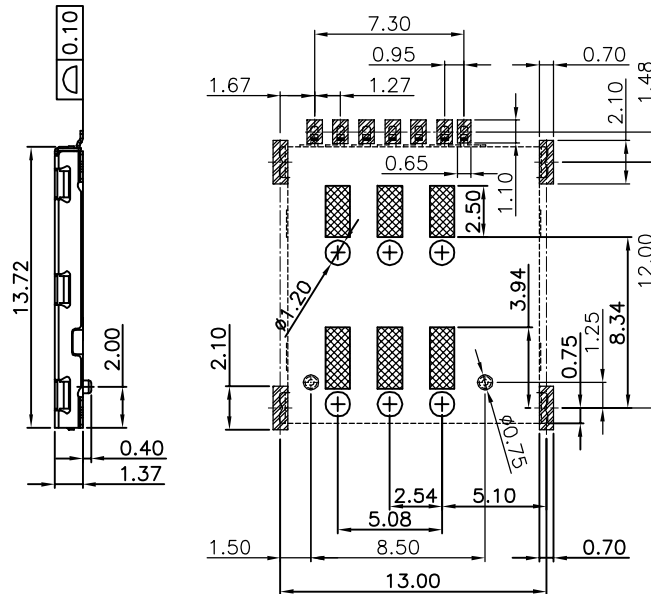


REV.	DESCRIPTION	DATE
A	RELEASE	Apr 15, 2016
B	20171205	Spe 05, 2017

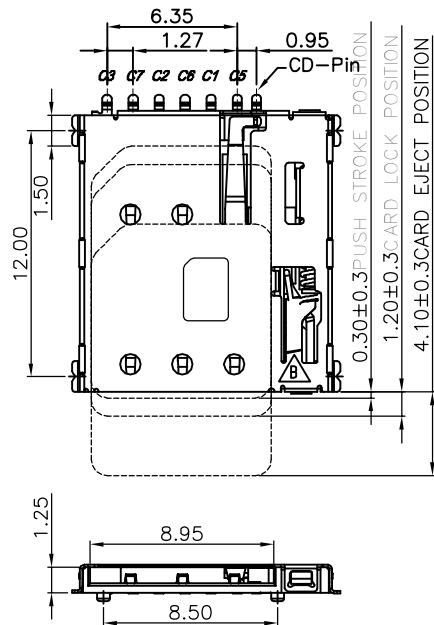

RECOMMEND PCB LAYOUT  
TOLERANCE: ±0.05  
TOP VIEW




### MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0) .
- TERMINAL : COPPER ALLOY, PLATING SEE TABLE.
- SHELL : SUS  
PLATING : NICKEL PLATED OVERALL.


### SPECIFICATION

- CURRENT RATING : 1.0 A. MAX.
- VOLTAGE RATING : 30V AC/DC.
- DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 1000MΩ MIN.AT 500V DC.
- CONTACT RESISTANCE : 50mΩ MAX.
- OPERATING TEMPERATURE : -40°C TO +80°C.

### PART NUMBER INFORMATION :

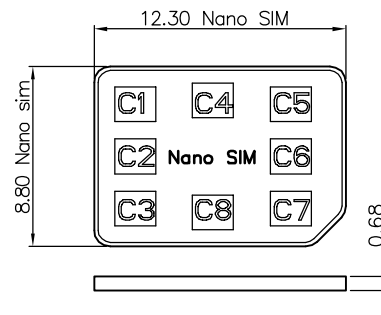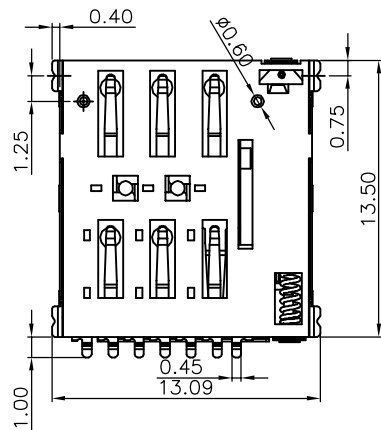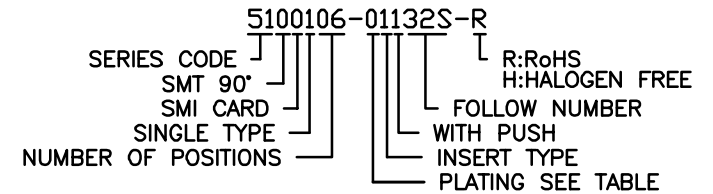


SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

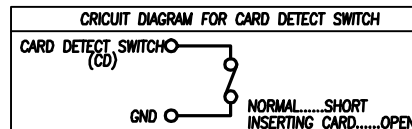

### DESCRIPTION OF PLATING ON TERMINALS

NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	6	GOLD 30u"

TOLERANCE  
.0=±0.25  
.00=±0.15  
.000=±0.05  
ANG.=±3°



UNITS : mm

SCALE NONE SIZE A7

DRAWER  
2/1  
CHECK  
2/1  
APP'D  
X/1/1/1

PRODUCT SPEC.

SHEET 1 OF 1 REV. B

**INMO**  
东莞市英墨电子有限公司  
INMO Electronics Co.,Ltd  
NAME  
NANO SIM CARD 6PIN  
PUSH 1.35H 带CD PIN

DRAW NO.

R5100106-01132S-R