
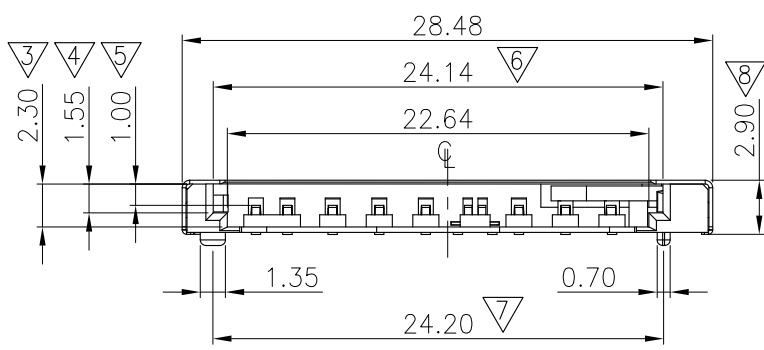
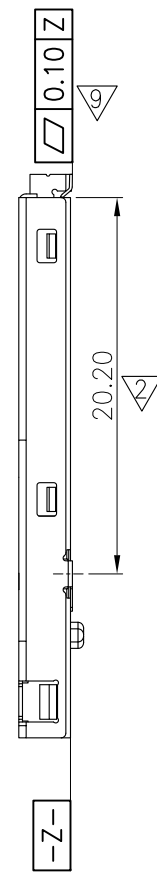


REV.	DESCRIPTION	DATE
A	RELEASE	May 05, 2016

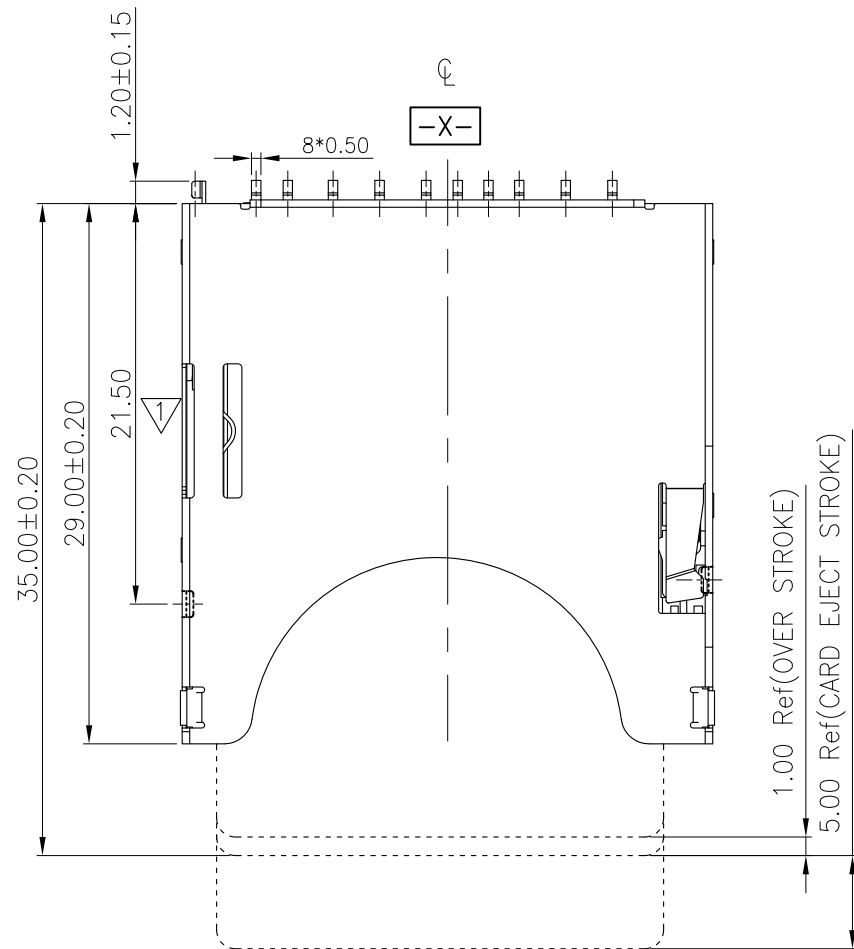


Specification

Material:
 Insulator: High Temperature Thermoplastic,UL 94V-0.
 Contact: Copper Alloy

Electrical:
 Current Rating: 0.5mA AC/DC max.
 Voltage Rating: 12V AC/DC.
 Ambient Temperature Range: -20°C~+60°C.
 Storage Temperature Range: -40°C~+70°C.
 Ambient Humidity Range: 95% R.H. Max.
 Contact Resistance: 100m max.
 Insulation Resistance: 1000M min./500VDC.
 Mating Cycles: 5,000 Insertions.

Usable Memory Card: SD&MMC Card.


PART NUMBER INFORMATION :

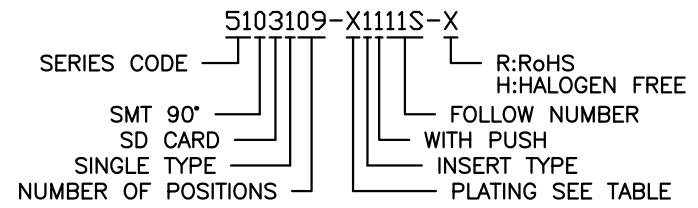

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	H	G/F + TIN

TOLERANCE .0=±0.35 .00=±0.25 .000=±0.05 ANG.=±3°	DRAWER 22 CHECK 22 APP'D 22/22	INMO 东莞市英墨电子有限公司 INMO Electronics Co.,Ltd
	PRODUCT SPEC. —	
UNITS : mm	SCALE NONE SIZE A5 SHEET 1 OF 1 REV. B	DRAW NO. R5103109-X1111S-X


REV.	DESCRIPTION	DATE
A	RELEASE	May 05, 2016

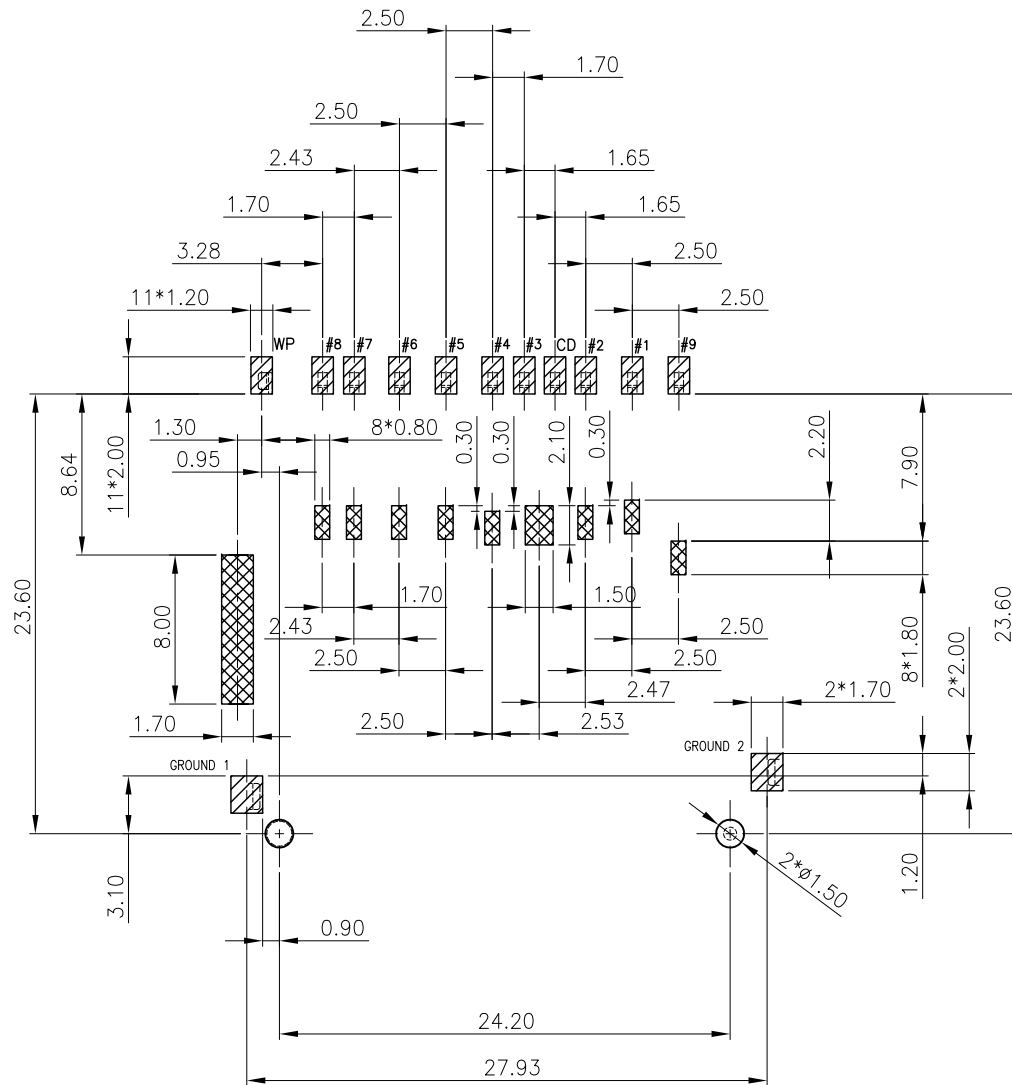

- PCB AREA
- CONNECT AREA
- KEEP OUT AREA

RECOMMEND PCB LAYOUT
TOLERANCE: ± 0.05
TOP VIEW

PIN NO.	PIN NAME
#1	(CD/DAT3)
#2	(CMD)
#3	(VSS1)
#4	(VDD)
#5	(CLK)
#6	(VSS2)
#7	(DAT0)
#8	(DAT1)
#9	(DAT2)

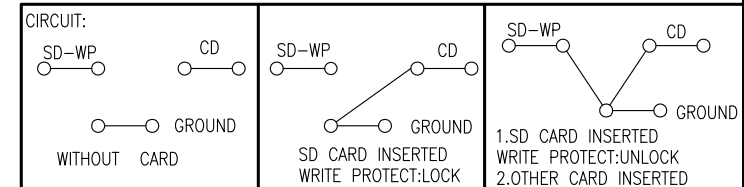

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	H	G/F + TIN

TOLERANCE .0= ± 0.35 .00= ± 0.25 .000= ± 0.05 ANG.= $\pm 3^\circ$	DRAWER <i>221</i> CHECK <i>221</i> APP'D <i>221</i>	INMO 东莞市英墨电子有限公司 INMO Electronics Co.,Ltd
	 UNITS : mm	
SCALE NONE	SIZE A5	SHEET 1 OF 1
REV. B	NAME SD CARD 2.90H PUSH	
DRAW NO. R5103109-X1111S-X		